

teno spin[®]

Keep it simple – Keep it safe




No compromises when it comes to feed quality and wrapping!

Best forage quality is one of the most important conditions for animal welfare and performance. Besides an optimal preparation of the crop, the combination of machine and film is very important to achieve a good silage quality. Tenospin films offer high operational reliability on your wrappers and improve the economic efficiency by maximal pre stretch levels. At the same time the low air permeability and the excellent adhesion of the film layers guarantee permanently sealed bales and best feed quality for your animals. Tenospin has been developed especially for round and square bales and works on all wrappers.

Premium multilayer blown film with best adhesive and stretching properties!

Many years of experience and gained knowledge regarding the requirements of baled silage and the production of film as well as the carefully selected PE raw materials and additives made this unique blown film possible. Multilayer construction and a blend of a high number of components ensure the important features for a silage film as adhesion, bonding, stretching, colour, tear-strength, UV-protection and a smooth surface.



The main functionality of our multilayer film

- » TACK LAYER
Adhesiveness / Tackiness
- » UP TO 5 FUNCTIONAL LAYERS
Strength / Stretchability / Tear & Puncture Resistance / Air Tightness / UV protection
- » SLIP LAYER
Low Friction & Adhesiveness/Smooth Surface

10 good reasons for Tenospin

- 1 Multilayer blown film with very good elasticity and stretching properties, suitable for all wrappers and regions.
- 2 Best silage quality due to the bale being perfectly sealed because of the high adhesive strength of the film.
- 3 Secured handling of bales avoiding surface damages under transport and handling due to our low friction slip layer construction.
- 4 The wrapped bales are with the right management very tight and weather protected. The film is also very strong which makes it tough against tearing and punctures.
- 5 Better efficiency due to very high pre stretch level up to 80% – for tightly wrapped bales and more bales per hour.
- 6 Care for the environment and save resources thanks to the selected raw materials. Film and cores are recyclable.
- 7 Very weather-resistant thanks to our special plastic core and the high UV-stabilization of the film. UV-protection for at least 12 months after wrapping, also in southern regions.
- 8 Selected raw materials for a constant quality for trouble-free usage also under extreme conditions as e.g. high temperatures, windy, dusty environments and high humidity.
- 9 We and our partners offer you a reliable supply and full service regarding all balewrap and silage questions.
- 10 No compromises! Tenospin has been tried and tested globally for decades and will always be a reliable choice!



**OUR
BALEWRAP GUIDE!**

Find the best and most
efficient film for your
wrapper easily online at:
tenospin.com

PRODUCT DATA

Dimensions


500 x 0.025 mm x 1800 m
750 x 0.025 mm x 1500 m
750 x 0.025 mm x 1700 m

Colours

White
Eco Green
Green
Black

Packaging

24 reels/pallet
15 reels/pallet
15 reels/pallet*

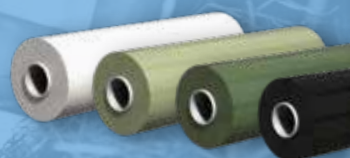

*Contractorwrap Packaging

TIP: Lighter colours reflect the sunlight resulting in a lower and more stable temperature in the bale and therefore enables a better silage quality!*

*Studies by Swedish University of Agricultural Sciences.

Efficient & sustainable silage making

We know the hazards and challenges of the harvest season and we can support you with our many years of experience. If you need help, our silage experts and technical support team is there to support you to improve your yield, efficiency and sustainability in your silage making - all over the world.

Find out more on tenospin.com



Follow us on Facebook and Instagram
@tenospin



Trioworld
Box 143
SE-333 23 Smålandsstenar
+46 371 345 00



APE Europe objective is to improve agri-waste recycling rate by the implementation of national collecting Schemes (NCS) all over Europe.